

Integrated Pleated Blind CHAIN MAGNETIC SYSTEM

Chain Magnetic System is a manually-operated magnetic system with raising and lowering functions for pleated blinds encapsulated within 22mm and 24mm cavity double glazing units.

By pulling the chain of the magnetic controlling unit fixed on the glazing, the magnetic mechanism in the headrail in the glazing moves.

It is an alternative for the cellular blind for those who want to prevent disturbing direct contact with the sun rays but, at the same time, do not want to make the setting too dark.


The system can be supplied either with warm edge or aluminum spacer bars according to demand.

The position of the pleated blind between insulated double glazing prevents any physical intervention. It also ensures that the blind is not dusted, contaminated, or affected by weather conditions. Thus, it does not require any maintenance and cleaning.

Suitable for every type of window frame.



FEASIBILITY CHARTS

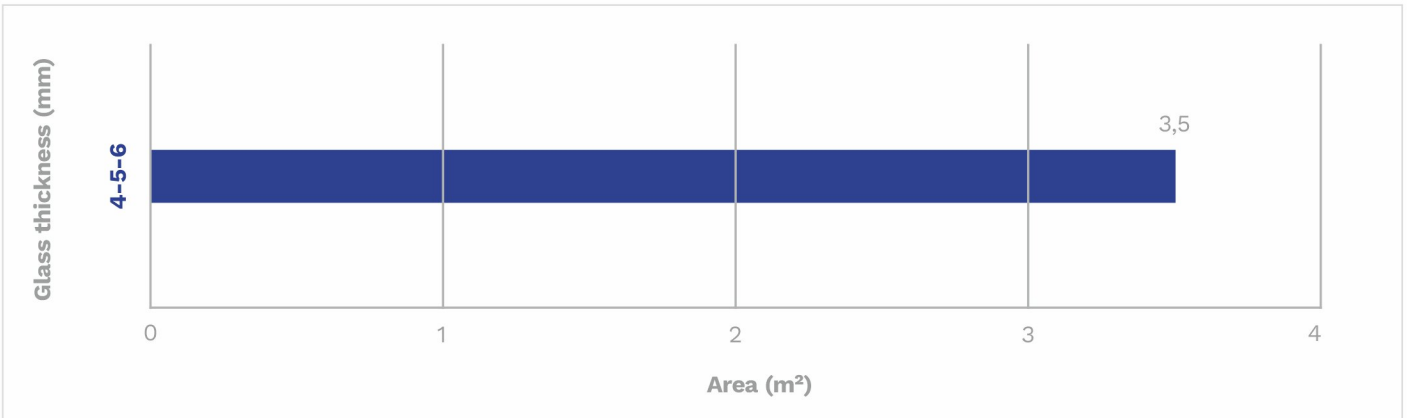

Possible Dimensions

W min = 250 mm * W max = 2000 mm
H min = 300 mm H max = 3500 mm

* When the width is less than 350 mm, the height shall not exceed 1300 mm.