

Integrated Venetian Blind PRACTICAL SYSTEM

Practical System is a manually-operated magnetic system with raising and tilting functions for venetian blinds encapsulated within 22mm and 24mm cavity double glazing units.

The system is operated by a magnetic slider, placed on the right or left edge of the glass. A narrow adhesive profile ensures the linear movement of the slider. The blind is raised and lowered by moving the slider up or down and tilted by slightly lifting or lowering the same slider.

Provides much faster raising & lowering without any need for a chain or cord.

Blind moves 1,9 meter when the button is moved for a meter.

The system can be supplied either with warm edge or aluminum spacer bars according to demand.

The position of the venetian blind between insulated double glazing prevents any physical intervention. It also ensures that the blind is not dusted, contaminated, or affected by weather conditions. Thus, it does not require any maintenance and cleaning.


Suitable for every type of window frame.



COLORS

0150 White	7010 Glossy Grey	4459 Beige
7016 Anthracite	7120 Golden Yellow	7113 Silvery Grey
0952 Matte Grey	4806 Dark Beige	4451 Cream

FEASIBILITY CHARTS

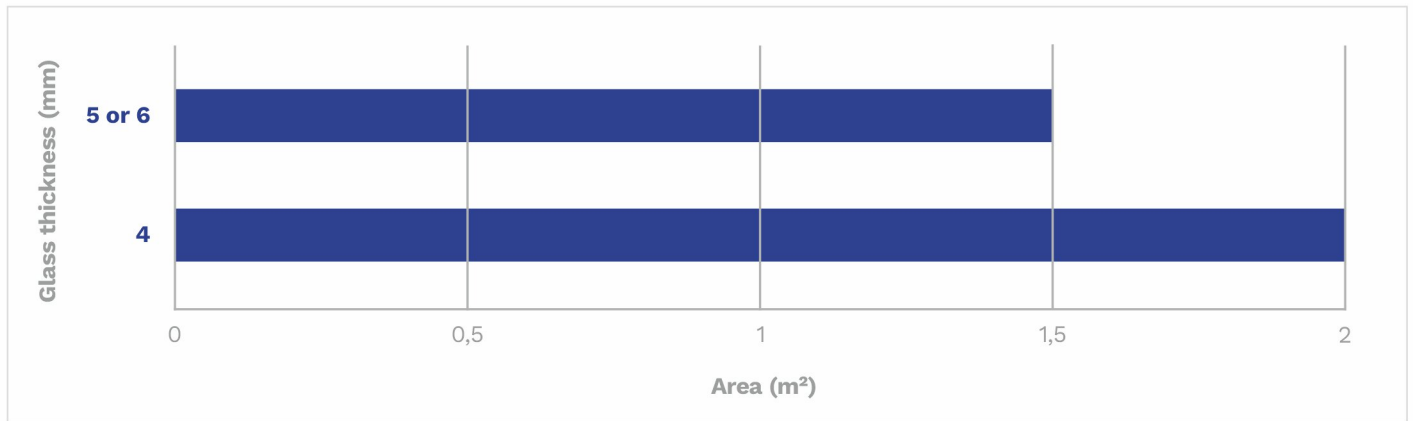

Possible Dimensions

W min = 250 mm * W max = 1000 mm **
H min = 600 mm *** H max = 2600 mm

* When the width is less than 350 mm, the height shall not exceed 1300 mm

** According to height, width can go up to 1400 mm

*** According to width, height can be less than 600 mm

Integrated Venetian Blind

PRACTICAL SYSTEM (TILT-ONLY FUNCTION)

Practical System with tilt-only function is a manually-operated magnetic system with tilting function for venetian blinds encapsulated within 22mm and 24mm cavity double glazing units.

The system is operated by a magnetic slider, placed on the right or left edge of the glass. A narrow adhesive profile ensures the linear movement of the slider. The blind is tilted by slightly lifting or lowering the slider.

The system can be supplied either with warm edge or aluminum spacer bars according to demand.

The position of the venetian blind between insulated double glazing prevents any physical intervention. It also ensures that the blind is not dusted, contaminated, or affected by weather conditions. Thus, it does not require any maintenance and cleaning.


Suitable for every type of window frame.



COLORS

0150 White	7010 Glossy Grey	4459 Beige
7016 Anthracite	7120 Golden Yellow	7113 Silvery Grey
0952 Matte Grey	4806 Dark Beige	4451 Cream

FEASIBILITY CHARTS

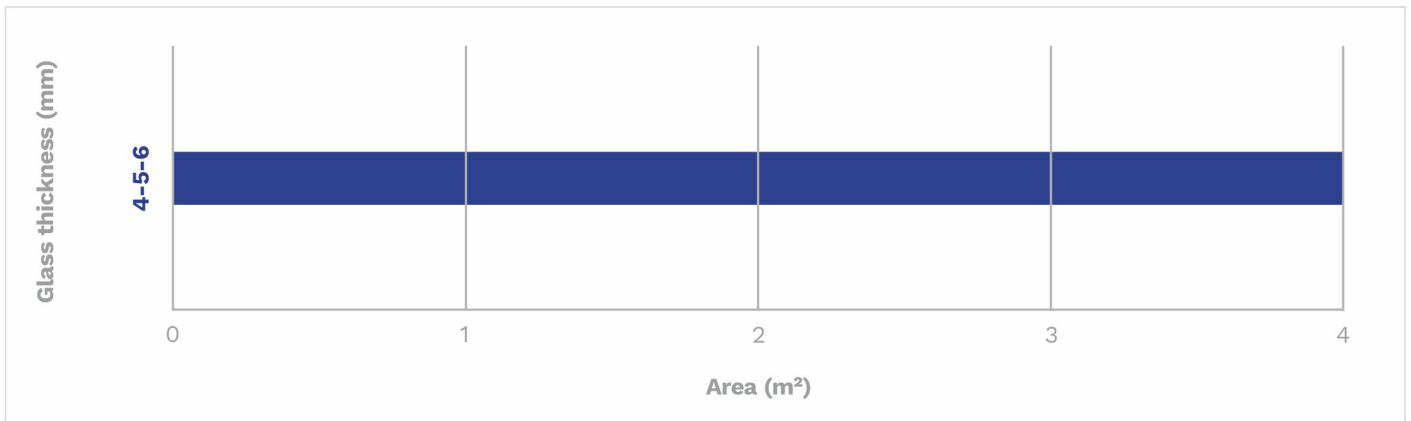

Possible Dimensions

W min = 250 mm * W max = 2000 mm
H min = 300 mm H max = 3500 mm

* When the width is less than 350 mm, the height shall not exceed 1300 mm